

Log into the management interface through WIFI:

Set “Operation Mode” to “Bridge”.



Bridge Mode:


After setting the router into bridge mode, it will immediately become a wireless AP with WEB management functions, and the RJ45 interface will become a LAN port. The router now only functions as a switch and cannot be directly connected to the Wide Area Network. The firewall function will not be effective.

Connect the network cable to the network port on a laptop or PC.
Disable the wireless card.

Configure a fixed IP to the wired network port:
192.168.200.100

255.255.255.0
192.168.200.1

Reopen the management page
Look for the upgrade link under
“Management”:

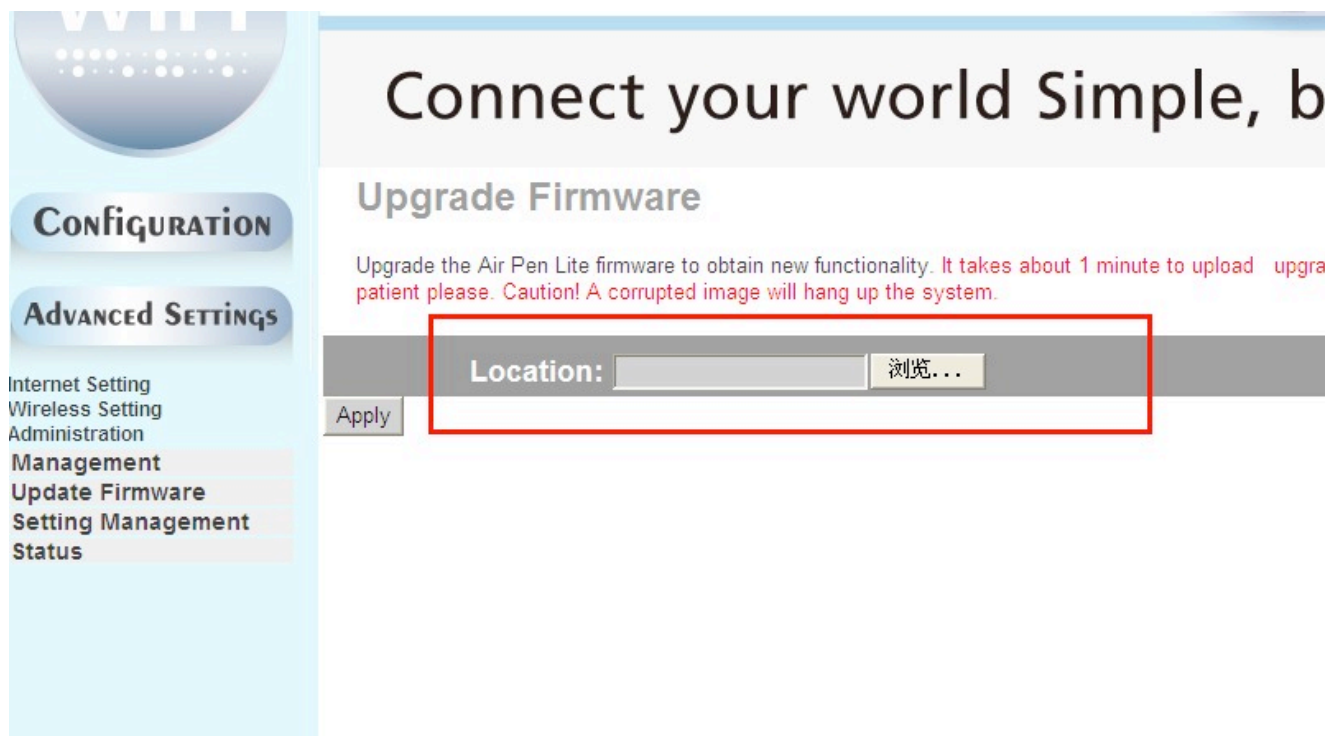

Upgrading files usually takes 2 to 3
minutes.