

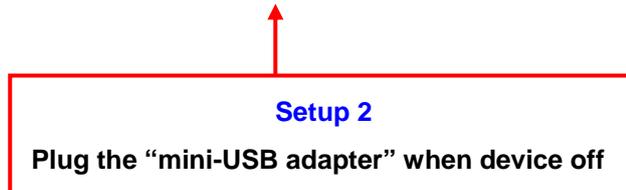


## < GM-130 OS + AP FW update procedure >



1. Please copy the OS & AP files to “**Micro SD card**” that have include <update folder> & <update.xml> & <xip.bin> & <Eboot.bin> & <Loader.nb0> & <OEMLOGO.bmp> of 5 files + 1 folder, then put into the SD slot of GM-130 and follow as below procedure to “**Main menu**” function~

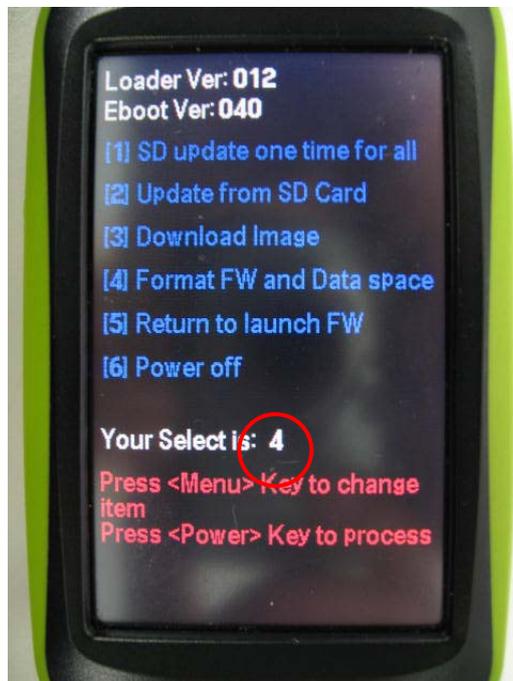



2. Please click the “Manu key” to change the item of “Your Select is : 1” to become 4 [Format FW and Data space], then press the “Power key” to confirm as show below~

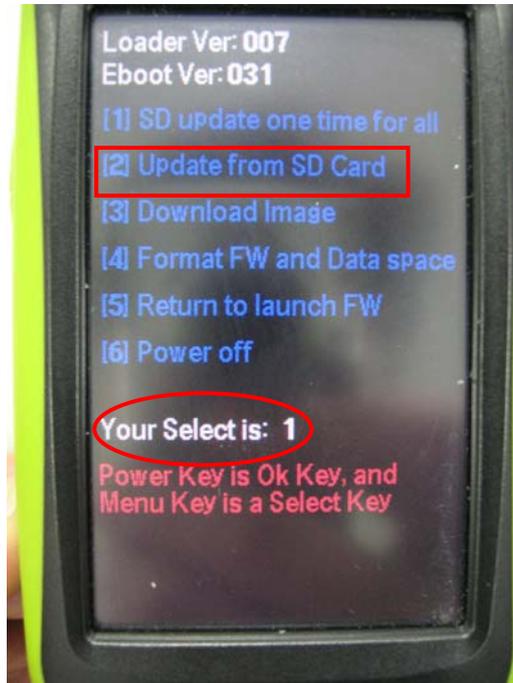


3. Please click the “Manu key” to change the item of “Your Select is : 1” to become **2 [Yes]**, then press the “Power key” to confirm the format procedure will start executing. Finally, you will see “**Format success**” message and click “Manu key” to go back “**Main menu**” function as show below~

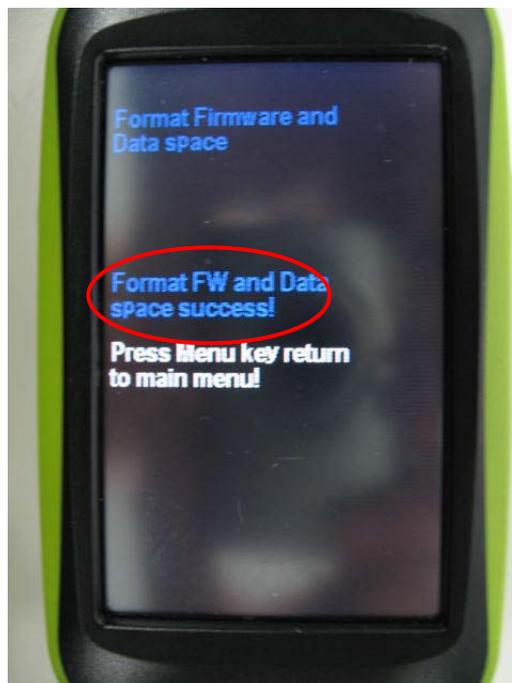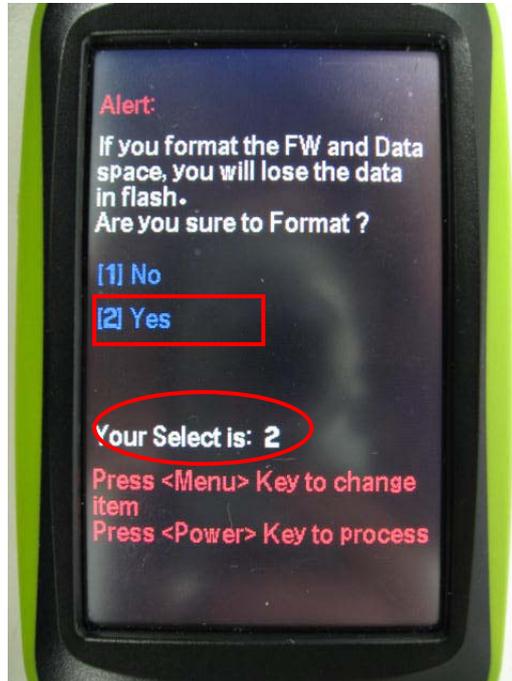

4. When it back to “Main menu” function of screen, please execute item **2 [update from SD card]**, then press the “Power key” to confirm. You will see the “updating menu” function with three file name. First, please choose “**[2] Eboot.bin**” to update, then device will show down when you update finish and press the “Power key” as show below~

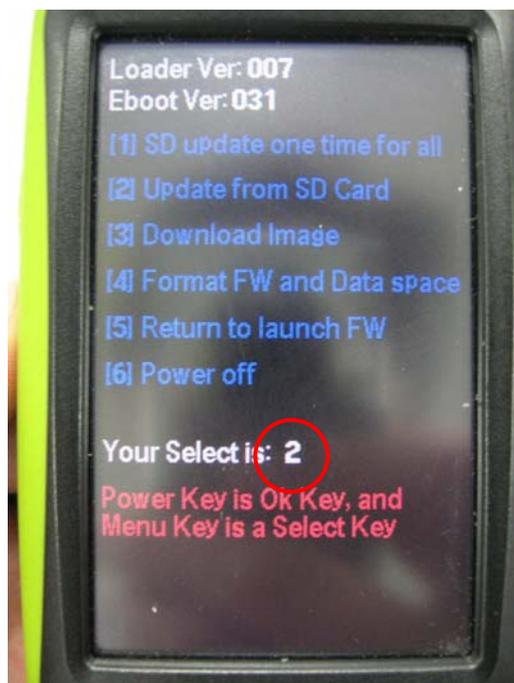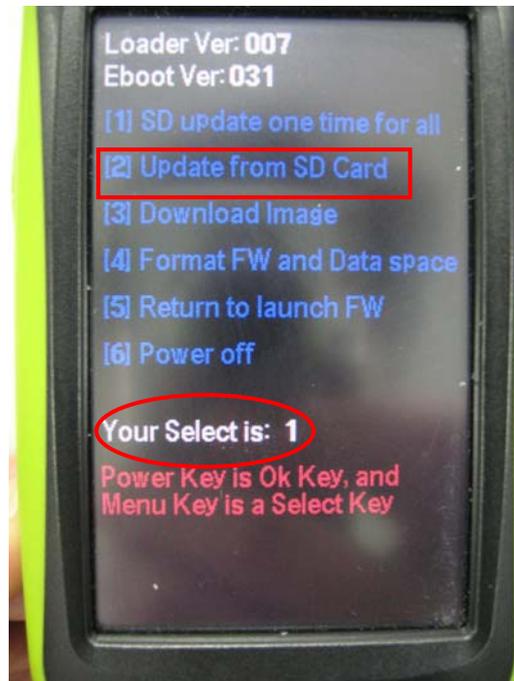


5. You will see the “updating menu” function with three file name. First, please choose “[2] Eboot.bin” to update, then device will show down when you update finish and press the “Power key” as show below~

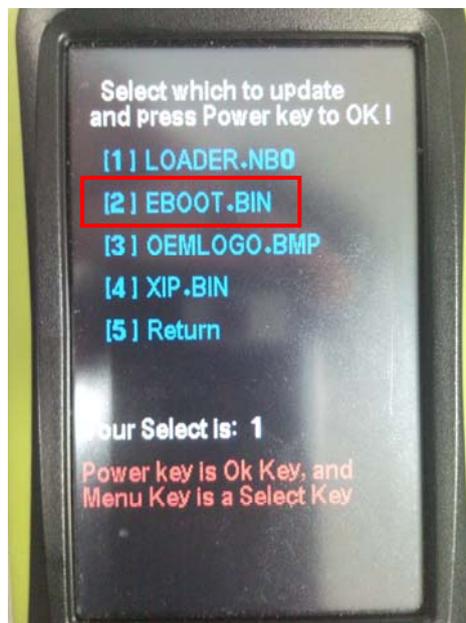



Note : Please press the “Power key”, the device will show down to reboot.

6. Please repeat the [procedure 1 & 2](#) to updating function menu, again. Please choose “[1] LOADER.NBO” to update, then the screen will return back to “Main manu” when you press the “Power key” as show below~

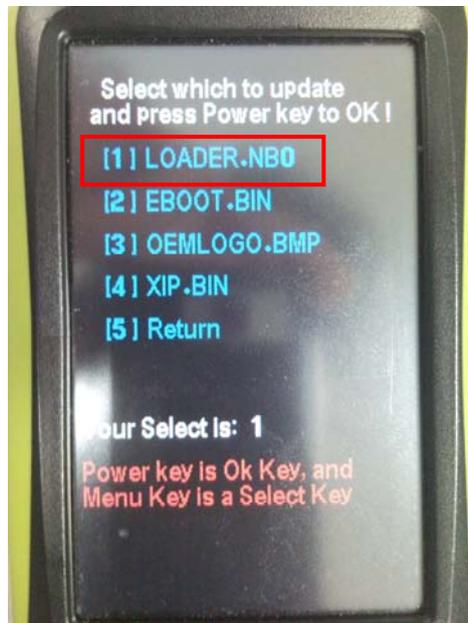

Note : Please return back to “updating menu” to execute next procedure, when you finish updating “Loader,nbo”

7. Please repeat the [procedure 1 & 2](#) to updating function menu, again. Please choose “[3] OEMLOGO.BMP” to update, then the screen will return back to “Main manu” when you press the “Power key” as show below~

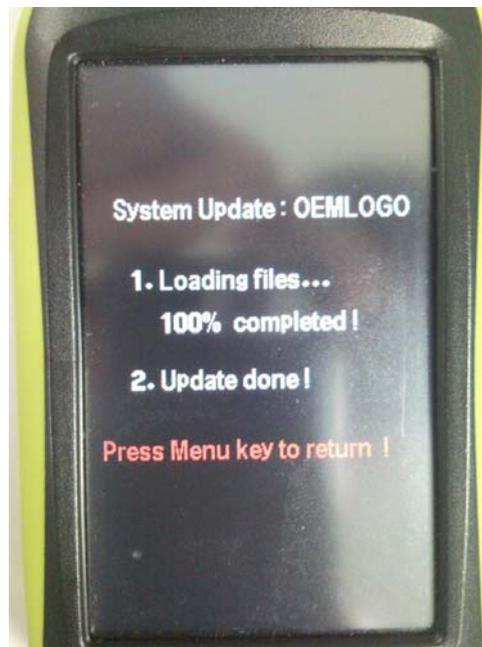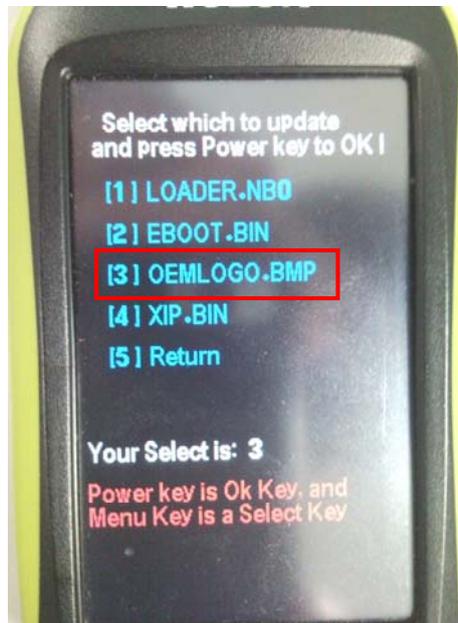

8. Finally, please choose "[3] XIP.BIN" to update, then the screen will display the windows CE of desktop when updating process finish in few minute as show below~

